



The solution for all your fencing needs

2012

Electric fence facts


Electric fence is a psychological barrier that keeps animals in and wild animals and predators out. A pulse of electric current is sent along the fence wire, about one pulse per second, from an energizer which is grounded. When the animal touches the fence, it completes the circuit between the fence and the ground and receives a short, sharp but safe shock. The shock is sufficiently memorable that the animal never forgets.

Because it is a psychological barrier, it does not require great physical strength. However, it must be well designed and constructed to absorb some pressure from animals, snow and wind. The energizer must have enough power for the length of the fence and for the animals being controlled.

For complete information on building an electric fence system, request the free Gallagher Power Fence Systems manual at www.gallagher.co.

Advantages of electric fence

- **Affordable: Electric fence is 50% less expensive to build and maintain than barbed wire**, according to the 2005 study by Iowa State University on estimated costs for livestock fencing.
- Easily constructed
- Low maintenance
- Lightweight and portable
- Durable - due to low physical contact
- Easily modified or expanded
- Keeps animals in and predators out

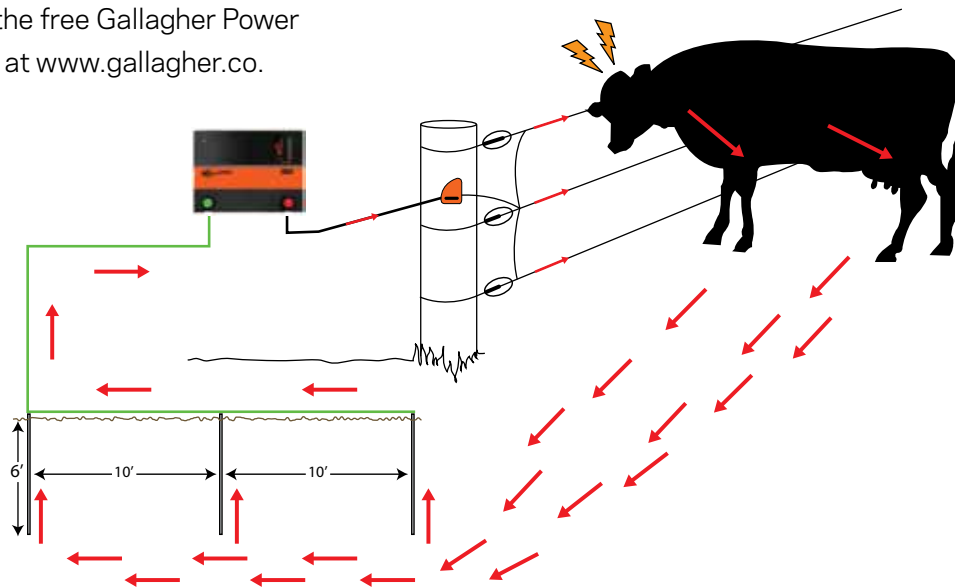

An effective grounding system is critical for optimal fence performance.

Getting started



To choose the right Gallagher products for your project, answer these questions:

1. What animals do you want to keep in or keep out?

2. Total area to be fenced

— See Gallagher Energizer Chart

— Use the Fence Calculator

Go to www.gallagherusa.com/electric-fencing/designMyFence.aspx or scan code above



3. What power source will you use for your energizer?

Gallagher 110 volt energizers are the best and most economical choice for areas where you have reliable power. Selected units have a battery backup for guaranteed animal control in areas where power may lapse. Solar powered energizers are the logical choice for remote areas. Portable battery energizers generally require a rechargeable battery.

110 Volt (Pg. 5-6)

Battery (Pg. 7)

Solar (Pg. 8)



4. Do you need a permanent, portable, or offset fence?

— For more information, see fence diagrams for nearly every design

Go to www.gallagherusa.com/electric-fencing/types/default.aspx or scan code above

Selecting Your Energizer				
	ENERGIZER	ACRES	MILES OF MULTI-WIRE FENCE	STOCK CONTROLLED
110 Volt	MR5000	2000	75	
	MBX2500	1000	50	
	MR2500	1000	50	
	M1800	420	42	
	M1000	250	34	
	M600	150	25	
	M300	85	17	
	M150	60	11	
	Wrangler	30	6	
	Rustler	20	3	
Yardmaster	8	1.25		
Battery	B1600	400	40	
	B700	200	25	
	B280	110	22	
	B200	90	15	
	B180	90	16	
	B100	60	7	
	B80	55	8	
	B60	40	5	
Solar	B11	6	0.6	
	S50	30	5	
	S20	14	2	
	S17	10	1	

Table is a guide only. In dry conditions, Energizers have proven to work effectively for more than twice the distance. In high vegetation growth areas, distances may need to be reduced.

Energizers

- Each Gallagher 110-Volt and battery energizer has performance indicator lights or digital displays, built-in lightning protection and RFI (Radio Frequency Interference) suppressed circuitry to reduce noise on radios and television.
- Energizer selection is determined by the species to be controlled and acres to be fenced. Check the Gallagher Energizer Selection Chart on page 3 to determine the energizer that best fits your need.
- All Gallagher battery energizers can be adapted for solar usage.
- Most battery units can also be adapted to 110 volts. (See power adaptor on pg. 7.)



2-Year Warranty on all Energizers

All Gallagher Energizers carry a 2-year warranty* (including lightning damage), in addition to a 30-day money-back customer satisfaction guarantee.

*with Gallagher lightning protection

Gallagher 110-volt energizers provide reliable performance and feature improved lightning protection. Controls are user-friendly and most models feature a highly visible bar graph to indicate battery capacity and output voltage. All Gallagher energizers deliver the power, performance, quality and reliability you expect from Gallagher.



MR5000

G376504

- 110 volt.
- Powers up to 2,000 acres/75 miles of multi-wire permanent fence.
- Stored Energy: 50 Joules.
- Built-in remote control capability (not included).
- Enclosure design features improved output terminals and accessible DIP switches.
- Power light indicates turbo power (flashing green), high power (green), low power (yellow) and standby (red).
- Lightning protection for both fence and Energizer.
- Short-circuit protection, prevents excessive heat from damaging the Energizer.



MR2500

G374504

- 110 volt.
- Powers up to 1,000 acres/50 miles of multi-wire permanent fence.
- Stored Energy: 25 Joules.
- Advanced lightning protection.
- Remote control capable, with remote control ID, remote sensitivity, and remote disable options.
- Full and low power options.



MBX2500

G302404

- Plugs into 110-volt outlet with battery backup or battery-only operation.
- Powers up to 1,000 acres/50 miles of multi-wire permanent fence.
- Stored energy: 25 Joules.
- Four large, easy-to-read digital displays show stored energy, output voltage, fence voltage and earth voltage.
- Remote controlled to switch the energizer on/off from anywhere on the fence line.



M1800

G314504

- 110 volt.
- Powers up to 420 acres/42 miles of multi-wire permanent fence.
- Stored Energy: 18 Joules.
- Green OK light flashes when the Energizer is working satisfactorily.
- Red indicator light flashes with each pulse at approximately 2,000 and above.
- Built-in lightning protection.


110-Volt Energizers



M1000

G382504

- 110 volt.
- 10 Joules of stored energy.
- Powers up to 250 acres/34 miles of multi-wire permanent fence.
- Quickscan Output Voltage: shows output voltage of the energizer at a glance and a digital output reading.
- Ideally suited for large pastures.

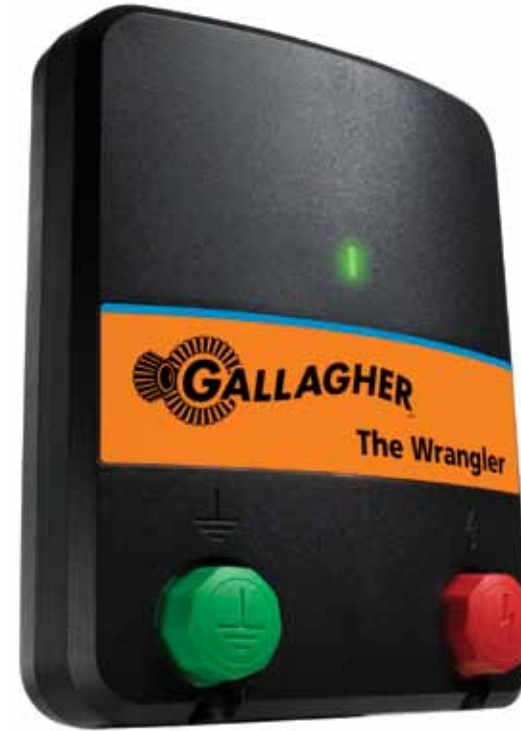

Wrangler

G330414

- 110 volt.
- Powers up to 30 acres/6 miles of multi-wire permanent fence.
- Stored Energy: 1 Joule.
- Green indicator light flashes when Energizer is working properly.



M600

G381504

- 110 volt.
- 6 Joules of stored energy.
- Powers up to 150 acres/25 miles of multi-wire permanent fence.
- Quickscan Output Voltage bar graph: shows output voltage of the energizer at a glance.
- Ideally suited for medium pastures.



M300

G380504

- 110 volt.
- 3 Joules of stored energy.
- Powers up to 85 acres/17 miles of multi-wire permanent fence.
- Quickscan Output Voltage bar graph: shows output voltage of the energizer at a glance.
- Ideally suited for small pastures.



M150

G328504

- 110 volt.
- 1.5 Joules of stored energy.
- Powers up to 60 acres/11 miles of multi-wire permanent fence.
- Indicator light flashes with every pulse.
- Ideally suited for small pastures.



Rustler

G383404

- 110 volt.
- Powers up to 20 acres/3 miles of multi-wire permanent fence.
- Stored Energy: 0.5 Joule.
- Maintains output voltage through heavy fence load.



Yard Master

G331414

- 110 volt.
- Powers up to 8 acres/1.25 miles of multi-wire permanent fence.
- Stored Energy: 0.2 Joules.
- Ideal for small farms, pets and gardens.

Battery-Powered Energizers

All the Gallagher Battery-Powered Energizers below have these features:

- Uses a 12V deep-cycle Marine battery.
- Ready to use with Gallagher solar panels to conveniently charge the battery.
- Bar graph can be used to indicate battery capacity and output voltage.
- Battery not included.



B80

G362504

- 12 volt.
- Powers up to 55 acres/8 miles of multi-wire permanent fence.
- Stored Energy: 0.8 Joules.
- Built in battery-save feature extends battery life.
- Easy to use 3-stage rotary dial to change Energizer operating functions.
- Compatible with 10 Watt solar panel.
- Convert to 110-volts with Power Adaptor G40100



B280

G366504

- 12 volt.
- Powers up to 110 acres/22 miles of multi-wire permanent fence.
- Stored Energy: 2.8 Joules.
- Built in battery-save feature extends battery life.
- Easy to use 5-stage rotary dial to change Energizer operating functions.
- Compatible with 20 Watt solar panel.
- Convert to 110-volts with Power Adaptor G40100



B180

G364504

- 12 volt.
- Powers up to 90 acres/16 miles of multi-wire permanent fence.
- Stored Energy: 1.8 Joules.
- Built in battery-save feature extends battery life.
- Easy to use 5-stage rotary dial to change Energizer operating functions.
- Compatible with 10 Watt solar panel.
- Convert to 110-volts with Power Adaptor G40100



B100

G392454

- Powers up to 60 acres/7 miles multi-wire fence.
- Stored Energy: 0.8 Joules.
- Highly visible low-battery and fence-voltage indicator lights.
- Carrying handle for easy transportation. * Weatherproof enclosure to contain battery.
- * Battery not included.



B200

G393454

- Powers up to 90 acres/15 miles of multi-wire fence.
- Stored Energy: 1.45 Joules.
- Highly visible low-battery and fence-voltage indicator lights.
- Carrying handle for easy transportation. Weatherproof enclosure to contain battery.
- * Battery not included.



B60

G351504

- 12 volt.
- Powers up to 40 acres/5 miles of multi-wire permanent fence.
- Stored Energy: 0.6 Joules.
- Use with a 12-volt, deep-cycle battery.
- Battery not included.
- Compatible with 5 Watt solar panel.



B11

G353414

- 12 volt.
- Powers up to 6 acres/0.6 miles of multi-wire permanent fence.
- Stored Energy: 0.11 Joules.
- Compact and portable case, designed to enclose six D-cell batteries.
- Built-in indicator light flashes with each pulse.
- Can be used with a 12-volt, deep-cycle battery.
- Battery save mode.
- 12-volt battery leads included.
- Batteries not included.



B40

G38631

- 0.4J stored energy.
- Powers up to 3 mile/25 acres of multi-wire permanent fence.
- 9V or 12V DC operation.
- Use with G51400 9-volt disposable battery (L 7½" x 6½" x W 5"). Battery sold separately.
- Modes: Off, on, night save or battery save
- Green LED flashes for Energizer OK, Red LED flashes for low battery (no indication of fence load).



B10

G36311

- .08 Joules stored energy.
- Ideal for strip grazing and protecting gardens from small animals.
- Battery options: 6 Super heavy duty long life "D" cell batteries or can be used with external 12-volt battery (not included).
- Ideal for use with Gallagher Smart Fence



9 Volt Disposable Battery

G51400

- 9-volt disposable battery.
- For use with B40 Energizer.
- L 7½" x 6½" x W 5"



Power Adaptor

G40100

- Get dual power option on selected Gallagher battery energizers.
- Converts B80, B180 or B280 to 110 Volt power.

Solar Energizers



S17 Solar

G344404

- 6 volt.
- Powers up to 10 acres/1 mile of multi-wire permanent fence.
- Stored Energy: 0.17 Joules.
- Built-in solar panel charges battery even on cloudy days.
- Large terminals enable correct grounding for best Energizer performance.
- High-impact, UV-resistant plastic case for weatherproof, rust-proof, insect-proof outdoor use.
- Maintenance-free rechargeable battery included.
- Fits on top of steel T-post.



B100 Solar

G3925K

- 12 volt.
- Powers up to 60 acres/7 miles of multi-wire permanent fence.
- Stored Energy: 0.8 Joules.
- Comfortable carrying handle for easy transportation.
- Highly visible low-battery and fence-voltage indicator lights.
- Weatherproof enclosure to contain battery.
- Battery not included.
- 10 Watt solar panel included.



S50 Solar

G359404

- 12 volt.
- Powers up to 30 acres/5 miles of multi-wire permanent fence.
- Stored Energy: 0.5 Joules.
- Safe, powerful animal control designed for outdoor and portable use.
- Can be mounted on a wall, T-Post, or sit on the ground.
- Highly visible rotary dial for turning the unit Off and On.
- Impact resistant plastic lens to protect the solar panel.
- Easy to maintain and clean.
- Maintenance-free rechargeable battery included.



S20 Solar

G357404

- 12 volt.
- Powers up to 14 acres/2 miles of multi-wire permanent fence.
- Stored Energy: 0.2 Joules.
- Safe, powerful animal control designed for outdoor and portable use.
- Can be mounted on a wall, T-Post, or sit on the ground.
- Highly visible rotary dial for turning the unit Off and On.
- Impact resistant plastic lens to protect the solar panel.
- Easy to maintain and clean.
- Maintenance-free rechargeable battery included.



B700 Solar

AFR700

- 7 Joules stored energy.
- For remote areas without charging facilities, powers up to 200 acres/25 miles of multi-wire permanent fence.
- Switch to select high, medium and low power settings.
- Neon fence indicator light flashes with each pulse.
- One fully charged 12 volt 100 amp hour battery will operate for approximately 8 days on high power, 14 days on low power.
- Uses a 12 volt deep cycle rechargeable battery - battery not included.
- 40 watt solar panel included



B200 Solar

G3935K

- 12 volt.
- Powers up to 90 acres/15 miles of multi-wire permanent fence.
- Stored Energy: 1.45 Joules.
- Comfortable carrying handle for easy transportation.
- Highly visible low-battery and fence-voltage indicator lights.
- Weatherproof enclosure to contain battery.
- Battery not included.
- 10 Watt solar panel included.

SmartFence

G70000

- Revolutionary, new all-in-one portable fencing system
- Completely self-contained; all you need to add is an energizer
- Quick and easy to install and take down
- Four-wire system, ten posts
- 328 feet long
- Easy to carry and store: combines posts, reels and wire in one convenient system
- Great for rolling terrain or flat ground
- Perfect for
 - Creating a temporary pasture within a larger area
 - Divide pastures for more efficient grazing
 - Grazing animals in non-fenced areas
 - Providing a safer roadside grazing area (versus a single wire)
 - Quick patch for fence breaks
 - Fence off silage bale stacks
- Recommended for containment of animals trained to electric fence
- Use with Gallagher energizers (110 volt, battery or solar) and a Ground Rod



Netting

ElectroNet

A201000

- 35"x 164' Roll.
- 8 conductive horizontal wires.
- White plastic vertical struts every 12 inches.
- Roll complete with all posts, just unfold and set the posts.
- Impenetrable mesh fencing for sheep, goats, coyotes and dogs.



Pos/Neg ElectroNet

A201200

- 35" tall prefab fence with vertical struts every 12".
- 164 feet long.
- For dry areas; good for sheep, goats, cattle.

Poultry Net

A207015

- 48" high prefab electrical fence with 12 horizontal lines.
- 164 feet long.
- ½" diameter white PVC posts every 8 feet.
- Double 6" spikes on each post for support.



Portable Fencing Accessories



HD Treadin Post

G636054 White

G63655 Orange

UV-stabilized plastic treadins with up to 9 lugs for positioning wires and tape to control domestic and wild animals.

- Simply step into the ground.
- Secures wire or tape up to 1½" wide.
- Uniquely designed lugs for positive holding and quick release of wire or tape.
- 42" high (including spike).
- Use two treadins for a stable corner.

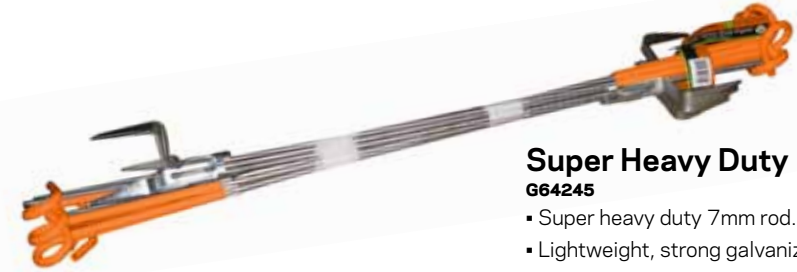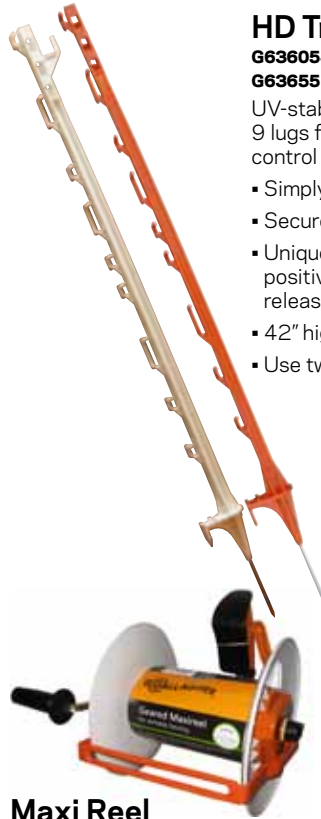

Super Heavy Duty Pigtail

G64245

- Super heavy duty 7mm rod. 42" (including spike).
- Lightweight, strong galvanized spring steel.
- UV-stabilized plastic insulation.
- Crimped foot to ensure shaft strength.

Maxi Reel

G631504

- Large galvanized hook for easy attachment to fence.
- Complete with wire guide for tangle-free winding
- Impact-resistant hub.
- Fast wind-in (2.7:1 turn).
- Shatterproof reel lock.
- Carry handle with knuckle-guard for safer use.
- Handy storage for Gallagher * Insul-Grip (included) or gate handle.
- Approx. capacity: ¾ mile Polywire, ⅔ mile Turbo Wire or ¼ mile Tape.
- Can be attached to galvanized Porta Reel Post (G63300)
- 1-year warranty



Geared Medium Reel

G611504

- Approx. capacity: ½ mile Polywire, ¼ mile Turbo Wire or ⅛ mile Tape.
- Reel guard keeps Polywire on reel for easier rolling and unrolling.
- Free Insulgrip gate handle included.
- Also available Geared Maxi Reel (G631504)



Medium Porta Reel

G611004

- Approx. capacity: ½ mile Polywire, ¼ mile Turbo Wire or ⅛ mile Tape.
- Free Insulgrip gate handle included.



Econo Reel

G616004

- ½ mile Polywire capacity.
- ¾ mile Turbo Wire capacity.

Grounding Equipment



Split Bolt Wire Connector G605

- Connects high tensile or regular wire with jumper or lead-in wire.
- Ensures good electrical connections.



Joint Clamp Standard G603554

- Ensures good electrical connections for up to four wires.
- Galvanized.



Joint Clamp (L Shape) G603934 - Wing nut G603034 - Hex nut

- Ensures good electrical connections.
- For multi-wire use.
- Galvanized.
- Dropped shoulder enables easy placement on wire.



Lightning Diverter G64800

- Helps protect the Energizer from lightning damage.
- Withstands multiple strikes
- Easily adjustable to suit any energizer
- Adjust with screwdriver



Warning Sign G602404

- Highly visible warning sign.
- Alerts pedestrians to electric fence.

Complete 3-Ground Rod Kit A655

- Three 6' galvanized rods.
- Heavy-duty clamps.
- 50' of 12 gauge galvanized wire.



Super Grounding Kit G88000

- Kit contains instructions and:
- One stainless steel rod.
 - One galvanized earth clamp.
 - 13.5 lbs of absorbent mixture.
 - Is equivalent to using three 6' ground rods.

Fence Testers



Livelite G505004

- Tells you in a flash if your power fence is operating.
- Visible from 3000' at night.



Neon Tester G501004

- Tests fence for sufficient power.



Digital Volt Meter G503014

- Monitors fence voltage and helps trace fence line shorts.



Smartfix G50900

- Volt meter, current meter, and short finder in one. Save hours checking fence lines for shorts.
- Auto On/Off activated when fence pulse is detected
- Retractable voltage probe for reading voltage in hard to reach places
- Large arrows point to direction of short



Power Fence Pliers G52200

- 8" side cutting pliers.
- Insulated handle.
- Cuts high-tensile wire.



Wire-Bending Tool G523004

- Galvanized.
- Designed for twisting Fiberglass Stay Clips (G702004) around wire.

Wire Tighteners and Handles



In-line Strainer Handle G69530

- Universal tool which fits most common brands of in-line strainers.
- Self-ratcheting for easier and faster use.



Wire-Tightener Handle A644

- Use with the Permanent "Wheel" Wire Tightener G64304.



Rapid Wire-Tightening Tool G645004

- For use with the G64304 Permanent Wire Tightener.
- Hooks on wire.
- Self-ratcheting.

Tools



4 Groove Wire Splice Tool

A609

- 20" Long.
- Features four slots for splicing up to 8 gauge wire.



2 Groove Wire Splice Tool

A609A


- Makes an excellent electric connection.
- Features two slots for use with FW2-3 and FWT3-4.
- Sample sleeves and Taps for 12.5 gauge smooth wire included.



High Tensile Wire Cutter

G524

- 9" long.
- Cuts 12.5 gauge high tensile wire.

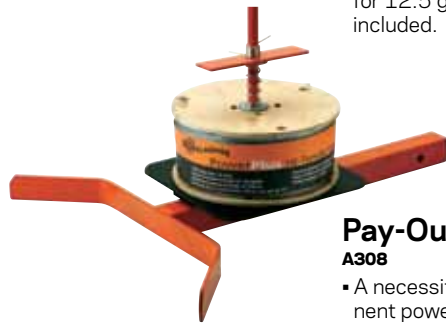

Pay-Out Spinner

A308


- A necessity for building permanent power fence.
- Adjustable brake keeps wire from overwinding.
- Attaches to a two-inch receiver.



H.D. Spinning Jenny

A309

- Accommodates all standard sizes.
- Disassemble for easy storage.
- Adjustable brake to keep wire from over-winding.



Spinning Jenny

A305

- Accommodates up to 100 lb. roll of wire.
- Will accommodate new EquiFence.
- Easy assembly.



Polywire Tensioner

AXLT8

- Holds Polywire, 1/2" Poly Tape and 1/4" EquiBraid.
- High impact, UV-resistant plastic.



In-line Strainer with Insulator

G79553

- Cliplock operates with a smooth "clicking" action in any position.
- G69530 tool required.
- Galvanized steel.
- Works on high tensile wire.



1 1/2" Tape Joiner

AH105

- Used to join 1 1/2" tape.
- Rust-resistant stainless-steel.



EquiFence Joiner

AH101

- Join EquiFence or 12.5 gauge wire without special tools or crimps.
- Strip special polymer coating off EquiFence and insert bare wire into joiner.



Double Insulated Underground Cable

- 12.5 gauge steel.
- Ideal for standard leadouts and undergate cabling.

Product No.	Length
G627014	65'
G627034	330'



Permanent Tension Spring

A290

- For permanent fences where stock pressure requires a flexible fence.
- Also for tensioning short lengths of fence.



XL Leadout Cable

G62793 - 330'

- 12.5 gauge aluminum coated.
- Ideal for long distances underground, through buildings, or where there are numerous gateways in the leadout system.
- Three times the conductivity of 12.5 gauge galvanized wire.



Permanent Wire Tightener

G64304

G64302 - 5 Pack

- Strong lightweight, permanent wire strainer.
- Works on high-tensile wire, barb wire and woven wires.
- No need to cut wire before straining
- Can be used to join wires

Permanent Fencing Accessories



PowerPlus™ Hi-Tensile Wire

A303 — ½ mile

- 2,640' per coil, 170,000 PSI.
- Engineered and manufactured especially for permanent power fencing, this 12.5-gauge wire is much stronger than standard fence wire and Class III galvanized for longer life.

XL Aluminum Wire

- This "User-Friendly Wire" will not rust, is easy to install and carries a lifetime guarantee against rust.
- Conducts electricity four times better than steel wire.
- Aluminum is one-third the weight of steel.
- Greater flexibility. Can be hand twisted and tied without the use of special tools.
- Easy to respool and ideal for controlled grazing.
- Product numbers, gauge and length below.

In-Line Strainer/ Termination Kit

G618034 - White

- Insulated wire strainer with pre-attached wire rope.
- Fits up to 7½" posts.
- No wire tying or special tools needed.

Super Strain Insulator/ Termination Kit

G618104 - 2 Pack

- Super strain insulator with pre-attached wire rope.
- Fits up to 7½" posts.
- No wire tying or special tools needed.



Product No.	Gauge	Length
AXL17250	17	250'
AXL171320	17	1,320' (¼ mile)
AXL141320	14	1,320' (¼ mile)
AXL142640	14	2,640' (½ mile)
AXL121320	12.5	1,320' (¼ mile)
AXL124000	12.5	4,000' (¾ mile)

Insulators

Gallagher builds insulators to last a lifetime. The porcelain insulators are fire-resistant and ideal for high fire-risk areas. The plastic insulators are made from UV-stabilized polymers for sun resistance, toughness and durability.

All Gallagher insulators feature long leakage paths and protective shields to achieve optimum performance from today's high-power Energizers.



Porcelain Bullnose Strain Insulator

G692034 - White

- Long-life, fire-resistant insulator.
- Suitable for long strains of permanent fence.
- 15-year warranty.



Polytube Strips

G614134 - White

G614034 - Black

- 23" strips.
- Can be used with EquiBraid.



Super Strain Insulator

G678124 - White

G677024 - Black

- New design for better handling and strength.
- Suitable for long strains of permanent fence.
- 10-year warranty.



Porcelain Doughnut Insulator

G674034 - White

- 1½" diameter.
- Fire resistant.
- High-quality, glaze finish.
- 15-year warranty.



1½" Tape End Tensioner

AH120



1½" End/Corner Tensioner

AH125

- Firmly secures 1½" tape.
- Unique clasp prevents movement and helps eliminate wear.
- High-density, impact-resistant polyethylene for strength and long life.
- Easy installation with lag screws.

Insulators



Screw-in Ring Insulator

G667 - White
G66604 - Black

- Angled slot allows quick securing and safe holding of wire.
- No need to create pilot hole first, simply screw into soft wood.
- 1-year warranty.



Corner Lag Insulator

G679 - White
G688 - Black


- Insulator swivels; great for pulling through corners.
- Polycarbonate with UV and color preservative.
- 5-year warranty.



Pinlock Wooden Post Insulator

G687144 - White
G687044 - Black


- Used with high-tensile wire.
- 10-year warranty.



Screw-on Rod Insulator

G655144 - White

- For round posts from 1/4" to 5/8" diameter.
- Holds any standard electric fence wire.
- Heavy-duty threads won't strip.
- 10-year warranty.



W Wooden Post Insulator

G673044 - Black

- Used with high-tensile wire.
- Superior-strength W insulator.
- 10-year warranty.

Most Gallagher Insulators come with a 10-year warranty



Horse Wire Insulator Super W

G676144 - White
G676044 - Black

- Designed for Gallagher Equi-Fence.
- Easily attaches to wooden posts.
- Extra large shield eliminates power leakage through tracking.
- Ribbed design for extra strength when stapled to post.
- New flexible jaws for quick release of wire if an animal collides with your fence.
- 10-year warranty.



Equi Pinlock Wooden Post Insulator

G626144 - White
G626044 - Black

- Extra-large shield eliminates power leakage through tracking.
- Accommodates EquiFence and braid products
- 10-year warranty.



1 1/2" Poly Tape Corner/End Strain Insulator

G670134 - White w/steel plate
G670034 - Black w/steel plate
G670124 - White Insulator only
G670904 - Steel Plate

- Firmly secures 1 1/2" tape to corner post.
- Unique rubber pads prevent tape movement and eliminate tape wear.
- Body made from high-density, impact-resistant polyethylene.
- Screws provided for easy installation.
- 1-year warranty.
- Steel plate pictured (G670904).



Locking 1 1/2" Poly Tape Insulator

G66913 - White
G669034 - Black

- Firmly secures 1 1/2" tape to post.
- Unique rubber pad eliminates tape wear.
- Positive locking and quick release.
- 10-year warranty.



Large Porcelain Lag Insulator

G675


- Long-life, fire-resistant porcelain.
- 5-year warranty.



Standard Porcelain Lag Insulator

G671

- Long-life, fire-resistant porcelain.
- 5-year warranty.

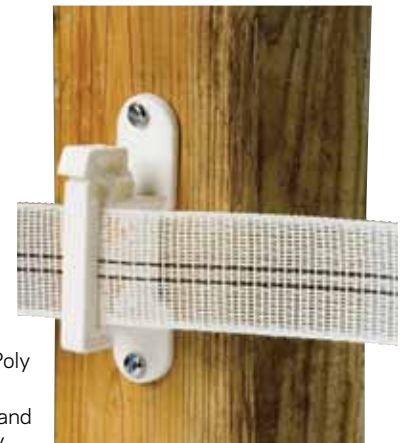

Horse Tape Insulator

G668144 - White
G668044 - Black

- Designed specifically for Poly Tape up to 1 1/2" wide.
- Poly Tape can be inserted and released quickly and easily.
- Staples to post and clamps to fiberglass.
- 10-year warranty.



T-Post Universal Insulator

G682134 - White
G682434 - Green

- Fits all T-Posts from 1¼" to 1½".
- Unique snap-on design, simple to install with no tools.
- Pinlock design allows for easy fence construction and wire removal.
- Wide jaw design to accommodate EquiFence and braid products.
- Sturdy pin for superior wire retention.
- 10-year warranty.



T-Post 1½" Tape Insulator

G654134 - White
G654434 - Green

- Fits all T-Posts from 1¼" to 1½".
- Unique snap-on design makes it simple to install with no tools needed.
- Specifically designed for ½" to 1½" tape.
- Also accommodates EquiFence and braid products.
- Holds tape tightly to prevent movement and to maximize tape life.
- 10-year warranty.



T-Post 5" Offset Insulator

G650134 - White
G650434 - Green


- Extra locking tab enables offset to fit all T-Posts from 1¼" to 1½".
- Extends wire from post to keep animals away from fence.
- Pinlock allows for easy fence construction and wire removal.
- Wide jaw to accommodate EquiFence and braid products.
- 10-year warranty.



5" Offset Wooden Post Insulator

G617134 - White
G617034 - Black

- Extends wire from post to keep animals away from fence.
- Pinlock allows for easy fence construction and wire removal.
- Wide jaw to accommodate EquiFence and braid products.
- 10-year warranty.



12" Offset with Pinlock Insulator

G659154 - White
G659054 - Black

- Pre-assembled.
- Attach to any existing wire fence.
- Brackets made from galvanized spring steel.
- Also available with porcelain insulator (G664054).
- Available for wood posts (G662054) and chain link (G653054) offset.



Pigtail Offset (6½")

G660214 - White
G610224 - Black

- Drives directly into wood posts.
- Can be used on side or top of post.
- Holds an electric wire 6½" from any existing fence.



Pigtail Offset Double (25½")

G660454 - White
G610424 - Black

- Can be used on top of post.
- Holds an electric wire 12" from any existing fence on both sides.



Universal 5" Offset Insulator

G694134 - White

- Multi-purpose insulator able to be attached to both sides of a steel post or nailed to a wooden post.
- Extended design holds the wire from the posts to keep animals away from fence.
- Pinlock clip allows for easy fence construction and wire removal.
- 10-year warranty.



T-Post Topper

G685134 - White
G685434 - Green

- Fits all T-Posts.
- "W" Insulator on top will accommodate any wire up to 3/8".
- Locking front latch accommodates any tape up to 1½" and any wire up to 3/8".
- 10-year warranty.



Multi-Purpose Insulator

G681134 - White
G681034 - Black

- Heavy-duty, snap-on plastic insulator for steel posts
- Can be nailed to wooden posts or screwed to vinyl posts
- 10-year warranty.



Gates and Equipment



HD Gate Handle

G639304

- Insulated handle.
- Large protective shields.
- Galvanized, non-turning hook.
- Hook is flat for maximum electrical contact.
- Heavy-duty tension spring.



Econo Gate Handle

G691104 - White

- Insulated handle.
- Large protective shields.
- Galvanized, non-turning hook secured to handle.
- Heavy-duty tension spring.



Ultra White Spring Gate

G640104

- Highly visible electrified gate with insulated gate handle.
- Spans 16½'.



3-Way Gate Anchor

G649114

- Screws or nails directly into wooden posts.
- Galvanized, mild-steel plate for long life.
- All edges rounded to prevent stock damage.



Lone Wolf Gate Latch

ALW100

- Black anti-rust coating, stainless-steel spring and lubrication will provide years of trouble-free service.
- Unique locking feature prevents accidental opening.
- Simple to open on foot or horseback.
- Padlock feature for added security.
- Attaches easily to most gates and doors.



Insul-Grip

G606304

- Insulated hook for quick and secure attachment of portable power fences.



Green Gate Handle

G68904

- Highly visible green insulated handle.
- Large protective shields.
- Galvanized, non-turning hook secured to handle.
- Heavy-duty tension spring.



White 1½" Tape Gate

G641004

- White tape and insulated gate handle for high visibility.
- Stainless steel tape joiners.
- Gate width up to 16½'.



One-Hand Gate Latch

F0202U

- Includes two staples and 14" chain.
- Secure against most animals.
- Can be padlocked.
- Easy to attach.
- One-hand operation, even wearing gloves.
- Gold Passivate.



Cut-Off Switch

G607634 - Green

- Enables a section of fence to be switched off for maintenance.
- Designed for today's high-powered Energizers.
- Positive ON/OFF action.
- Screw onto post with two screws provided.



Cut-Off Switch (Knife)

G610

- Use at gates and for easy location of fault finding.
- Switch off a section of fence for maintenance and routine checks.




Bungee Gate

G640504

- Highly visible shock cord that stretches from 11½' to 23'.




Gate Accessories/Fiberglass Posts & Sleeves



Lock Through-Post Gate Hanger

- Zinc coated.
- Locking arm prevents Gate Hanger turning in post.
- Roll threaded.

	A	B	C	D
F0042U	5/8"	1 5/8"	4"	10"
F0046U	3/4"	2"	4"	14"



Through-Post Gate Hanger

- Zinc coated.
- The long pin (B) makes gate hanging easier by allowing the gate to slide down the long pin before engaging a short bottom pin.
- The long pin can be padlocked.
- Roll threaded.

	A	B	C
F0023U	5/8"	1 5/8"	10"
F0029U	3/4"	2 3/4"	14"

7/8" Fiberglass Fence Post

- Use where a stronger, stiffer fence post is required.
- Also used in feedlots or near buildings where animals may be pushed into the fence.
- Predrilled every 2" for convenient wire spacings with exception of bottom 18" on FRP60, FRP66 and FRP72.
- 25-year U-V protection warranty.

Product No.	Height
AFRP48	48"
AFRP60	60"
AFRP66	66"
AFRP72	72"



T-Post Sleeve w/Cap AH140

- Heavy-duty, poly-vinyl sleeve fits all T-Posts: 2"x 2"x 54".
- All virgin white material, no co-extrusion, 0.08" thickness.
- Lifetime warranty.
- Insulators install quickly without drilling using #10x5/8" sheet-metal screws.



Fiberglass Post Clips G704004

- Fast and easy to use.
- Galvanized mild steel.



Standard Strap Hinge F0125U

- 5/8"x 12".
- Zinc coated.



Heavy-Duty Strap Hinge F0132U

- 3/4"x 15".
- Zinc coated.



Fiberglass Stay Clips G702004

- Tight tie prevents slipping.
- Can be used as a post clip if tie is loose.
- Galvanized mild steel.

Wire, Tape and Braid

There are three main criteria for determining which type of Gallagher tape, wire and braid to choose for your specific application:

- **Conductivity:** how much power the product delivers and how far.
- **Durability:** how the product stands up under varying conditions.
- **Design:** how the product performs long term.

The Turbo line developed by Gallagher meets all three criteria; the use of mixed-metal strands offer the best of all worlds—power, performance and durability.

Additional tips for determining the best Gallagher product to meet your needs:

- **Poly Tape/Turbo Tape:** generally used where visibility is important.
- **Polywire/Turbo Wire:** preferable where wind or adverse weather conditions exist.
- **EquiBraid:** is a braided product designed not to “tangle” or overstretch.



A. Turbo Wire	<ul style="list-style-type: none"> ▪ Best suited to distances more than ¼ mile, where extreme power is required. ▪ Turbo Wire (9 strand) resistance is 209 ohms/mile — 40 times more conductive than standard Polywire.
B. ½ Turbo Tape	<ul style="list-style-type: none"> ▪ Resistance: 400 ohms/miles. ▪ Ideal for semi-permanent and portable electric fences. ▪ Best suited for distances greater than ¼ mile.
C. 1½ Turbo Tape	<ul style="list-style-type: none"> ▪ Resistance: 230 ohms/mile. ▪ Ideal for horse fencing. ▪ Best suited for distances greater than ¼ mile.
D. Turbo EquiBraid	<ul style="list-style-type: none"> ▪ Resistance: 155 ohms/mile. ▪ Most user-friendly for horse fencing. ▪ Best suited for any distance.
E. Polywire	<ul style="list-style-type: none"> ▪ Resistance: 10,000 ohms/mile. ▪ Best suited for distances under ¼ mile.
F. ½ Poly Tape	<ul style="list-style-type: none"> ▪ Resistance: 13,600 ohms/mile. ▪ Best suited for distances under ¼ mile.
G. 1½ Poly Tape	<ul style="list-style-type: none"> ▪ Resistance: 3800 ohms/mile. ▪ Ideal for horse fencing. ▪ Best suited for distances under ¼ mile.
H. EquiFence	<ul style="list-style-type: none"> ▪ Resistance: 560 ohms/mile. ▪ Ideal for horse fencing. ▪ Best for permanent fence.

A. Turbo Wire

- G620544** 656' (½ mile)
- G620564** 1,312' (¼ mile)
- G62089** 2,624' (½ mile)
- Nine mixed-metal strands.
- 40 times more conductive than standard Polywire.
- UV-stabilized and strong for longer life.
- Ultra-white, clearly visible to animals.

B. ½ Turbo Tape

- G623544** 656' (½ mile) White
- G623554** 656' (½ mile) Green
- G623564** 1,312' (¼ mile) White
- Ideal for semi-permanent and portable electric fences.
- Ultra white for high visibility and better animal control.
- Patented mixed-metal wires interconnected every 8" for maximum conductivity.
- 30 times more conductive than standard Poly Tape.

C. 1½ Turbo Tape

- G624544** 656' (½ mile) White
- G624554** 656' (½ mile) Green
- 15 mixed-metal strands.
- 15 times more conductive than standard 1" Poly Tape.
- Reinforced edges for longer life.
- Open-weave for low wind resistance.

D. Turbo EquiBraid

- G62174** 656' (½ mile) White
- G621754** 656' (½ mile) Green
- G62176** 1,312' (¼ mile) White
- G621774** 1,312' (¼ mile) Green
- Unique ¼" braided construction.
- Contains nine strands of highly conductive mixed-metal filaments to ensure conductivity.
- Most user-friendly equine product.
- Highly visible, attractive and safe.

E. Polywire

- G620044** 660' (½ mile)
- G620300** 1,320'+300'
- Ideal for portable electric fences.
- Ultra white for high visibility and better animal control.
- UV-stabilized for longer life.
- Six stainless-steel wires for good conductivity.

F. ½ Poly Tape

- G623144** 656' (½ mile) Orange
- G623044** 656' (½ mile) White
- Ideal for portable electric fences.
- Five stainless-steel wires for good conductivity.

G. 1½ Poly Tape

- G624044** 656' (½ mile)
- Ideal for horse fencing.
- Fifteen stainless-steel wires for good conductivity.
- White with green stripes.

H. EquiFence

- G912064** 1000' White Conductive
- G910164** 1000' Black Non Conductive
- G910134** 500' Black Non Conductive
- Safe, effective solution for permanent horse control.
- UV-resistant white for high visibility and long life.
- Core of 12.5 gauge, medium-tensile galvanized wire.
- Unique, electrically conductive polymer allows use as an electric fence wire.
- Also available in non-conductive.
- 10-year warranty.

Less cost. Less installation time. Better results.

Electra-Lock Permanent Fencing System distributed exclusively by Gallagher

Revolutionary fencing system designed to improve livestock containment at a fraction of the cost of traditional fencing methods.



- The cost savings are almost half of standard barbed-wire construction.
- Installs with same corner & gate posts as standard barbed wire.
- Recommended post spacing, depending upon terrain, is every 50' for 1" fiberglass posts, 40' for wood posts and 25' for steel t-posts.
- Tighten each strand independently with in-line strainers (G79504) or permanent wire tightener (G64304) for installation over uneven terrain and easier maintenance

- Four or five strands of hi-tensile, class 3 galvanized wire
- 10" wire spacing with vertical stay every 24"
- 660 foot roll
- Strength of 12.5 gauge hi-tensile wire
- Specially designed lock knot holds vertical stays in place
- Can be energized with dependable Gallagher energizers to create a more effective barrier and keep livestock off the fence for longer life
- 4 wire 30" high – **A43024660**
- 5 wire 40" high – **A54024660**

Electra-Lock Wire Dispenser

AELD1000

- For easy, fast installation
- Attaches to vehicle receiver hitch

Why weigh?

Regular weighing of livestock is vital to increased productivity and farm profitability. Well-informed management decisions come from animal weight data that is easily obtained and accurate.

Gallagher livestock weighing system products are quality engineered to offer you simplicity, toughness, reliability and innovation. The Gallagher range of superior animal weighing products allows you to:

- Measure feed conversion by monitoring weight gain over time to maximize yield
- Monitor animal health
- Confirm animal weights prior to breeding season
- Determine weaning weights
- Select animals by weight for sale
- Evaluate performance for genetic selection
- EID compatible weigh scales now enable individual animal weight management for improved animal performance



What does the Gallagher Weighing System Offer You?

The Gallagher SmartScale Weighing System can be configured to accommodate any weighing requirement and application. Plus, it works interactively with Electronic Identification (EID) tags (some models) and most herd management software programs to allow for seamless electronic collection and analysis of animal performance information.

Weigh Scale W210

Entry level weigh scale

G012504

- Large easy to read display screen
- Tough shock and waterproof case
- Simple to use with large rotary selector knob
- Large labeled push buttons for easy selection
- Internal rechargeable battery with charge indicator and low voltage shutdown
- Three weighing modes for quick and easy weighing: auto, manual and fine
- Compatible with most animal weighing loadbars



Weigh Scale W610

Entry level EID weigh scale

G01605



Same as W210 plus:

- Backlit screens for use in barns
- Easy to use keyboard for alphanumeric ID's
- Up to five way sorting
- Memory capacity and weight records of 12,000 animals
- Easy input of relevant information during weighing session:
 - 15 digit visual tag number
 - 2 digit condition score entered on keypad
 - Assign visual tags against EID tag number
- Hands free entry and storage of EID tags when animals are first scanned
- Auto increment setting automatically sets weight increments for different animal types
- Calculates average daily weight gain and carcass weight
- Duplicate tag warning in current session
- Scroll through records in previous weighing sessions on screen
- Continue weighing session while charging battery with AC adapter or external battery
- EID reader, automated sorters and computer connections
- MyScale Pro software included for easy data download to computer

Weigh Scale and Data Collector W810

Advanced EID weigh scale and data collector

G01805



Same as W610 plus:

- Bluetooth for wireless connection to EID reader
- Up to nine way sorting
- Sort category stored on animal record for later analysis
- Memory capacity for 21,000 animals and 60,000 weight records
- Enter notes, custom traits and edit data during weighing session:
 - 15 digit visual tag number
 - Assigns date of every weight record
 - Animal notes stored with each weighing record
- Configure trait table on computer for capturing specific animal attributes while weighing
- Super fast sort by list operation

W210 Package

AG210

Weigh Scale W210

G012504

Alleyway Loadbars


G06000

Heavy Duty

Aluminum

Platform

G05900

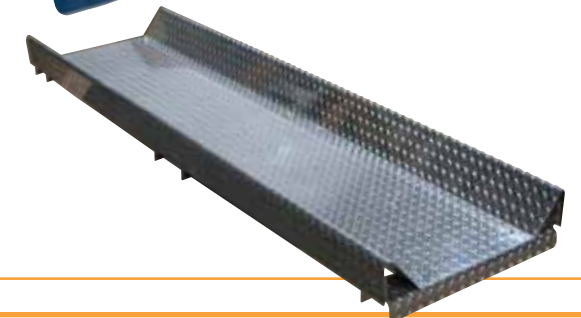

Weigh Scales

Gallagher TSI Animal Management System

Fully comprehensive livestock management system

G01900



- Integrated weigh scale, computer and animal management system in one, enabling improved livestock management and performance
- Provides immediate access to detailed animal information, anywhere, at any time - in the yard or office, anywhere on the farm
- Award-winning Animal Performance Systems Software (APS) software with yard mode and office mode
- Easily customized weighing and data recording sessions to automatically collect specific animal ID, traits, activities, notes and life data
- Record observations or future actions required for specific animals, such as withholding periods and unlimited notes per animal
- Configure group and herd tables
- Comprehensive sorting capability. Sort by weight, EID number or any other user-defined rule
- Speech function delivers audible animal information for hands free operation
- Memory storage capacity for at least 100,000 animals
- Bluetooth wireless connection for EID readers and sorters

HR-1 Reader

G03300

- Communicates with weigh scales and other data capture devices.
- Powered off Gallagher SmartScales and other brands of weigh scales.
- Tag read confirmation provided by loud beeper, and super bright LED at end of snout.
- High performance, super fast read of both HDX and FDX tags.
- External battery powered. (Battery not included.)



HR3 Wireless Reader

G03301

- Communicates with weigh scales and other data capture devices using Bluetooth wireless connection.
- Internal memory for 5,000 tags for later download to computer.
- Tag read confirmation provided by loud beeper, vibrating handle, and super bright LED at end of snout.

Smart Reader Electronic Controllers



G031404



G031504

- HDX and FDX-B, ISO and NAIT Tag compatible
- No antenna tuning required
- Can be used with either antenna panel below

BR Series Electronic Controller

- Battery powered electronic controller for livestock identification
- Internal rechargeable battery
- Easy to read battery charge indicator
- Internal memory stores 20,000 tags
- Tag counter display screen records animals scanned
- Download stored records to computer

R Series Electronic Controller

- Electronic controller for livestock identification
- Requires external 12 volt power source (not included)

Smart Reader Panel Antennas

- Suitable for walk past identification applications
- HDX and FDX-B ISO compliant panel
- Waterproof antenna panel
- Mounting hardware supplied
- Can be used with either electronic controller above



G031424



G03121

Large Panel Antenna

Dimensions: 23½" W x 51½" H

Small Panel Antenna

Dimensions: 15¾" W x 23½" H


Weigh Scales



Alleyway Loadbars

G06000

- 4,400 lbs. weighing capacity in 23" length.
- 18' long, tough polyurethane loadbar cables.
- Moisture-proof connectors.
- Fully water resistant.
- 2-year warranty (parts and labor).

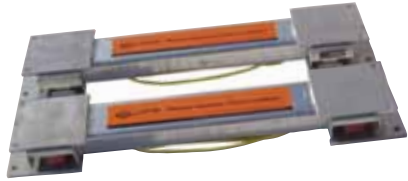

Manual Squeeze Chute Loadbars

G06304


- 7,700 lbs. weighing capacity in 39" length.
- 18' long, tough polyurethane loadbar cables.
- Moisture-proof connectors.
- Fully water resistant.
- 2-year warranty (parts and labor).



Super Heavy-Duty Hydraulic Squeeze Chute Loadbars

G06404

- 9,900 lbs. weighing capacity in 39" length.
- 18' long, tough polyurethane loadbar cables.
- Moisture-proof connectors.
- Fully water resistant.
- 2-year warranty (parts and labor).

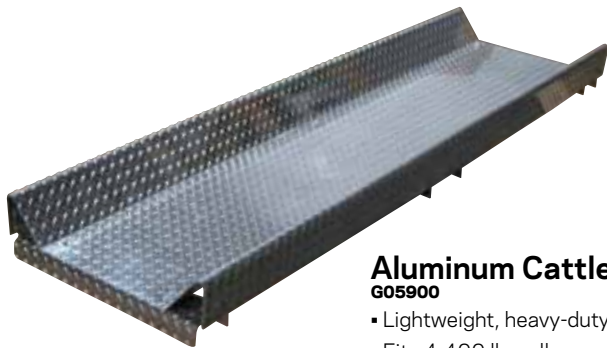

Aluminum Cattle Platform

G05900

- Lightweight, heavy-duty livestock platform.
- Fits 4,400 lbs. alleyway loadbars.
- 86½" long, 24½" wide.
- Weighs 49 lbs.

Stock Prods & Accessories



Stock Prod Handle

AHU-150

- Lightweight/water resistant
- 10" long
- 4 "C" batteries included
- 1 Year warranty



Stock Prod Handle

AHU-200

- Sealed motor
- 10" long
- Removable battery case
- 4 "C" batteries included
- 2 Year warranty



Stock Prod Shafts

AFX32 — 32" long with handle (shaft is 22")

AFX36 — 36" long with handle (shaft is 26")

AFX42 — 42" long with handle (shaft is 32")

- Inset molded brass prongs for longer life
- Fit either AHU-150 or AHU-200 handle
- Overall length includes handle
- 1 Year warranty



Handy Shock

AHP2

- Only 9.4 ounces
- Pocket size
- Includes 4 "AA" batteries
- 1 Year warranty

54" Sorting Pole

ASPOLE54

- Orange fiberglass shaft
- Heavy duty rubber tip
- Golf grip handle



48" Sorting Paddle

ARSP48

- Noise makers inside
- Golf grip handle



The MiraFount Energy Free Tank

Water normally comes from the ground around 42° to 52° F. When the water enters the MiraFount and the closures float up and seal off the drinking ports, the MiraFount becomes a thermos for livestock.

Whenever an animal drinks, it removes a quantity of water which is immediately replaced by ground water through the valve.

A minimum of 20 head of livestock will keep the MiraFount frost free all winter.

- 5 year warranty.
- Stainless steel anchor bolts included.



Mirafount A3390

Capacity: 150 head beef
60 head dairy

Gallons: 44

Specifications: Two 10" openings/
10¾" ball closures

Dimensions: 43"x 29"x 20"

- Split top-end panels can be easily removed to help get new cattle started fast. Or, remove the panels to provide more capacity for a few extra head.



Mirafount A3354-S

Capacity: 200 head beef
90 head dairy

Gallons: 70

Specifications: Four 9½" openings/ 10¾" ball closures

Dimensions: 57½"x 32½"x 19"

- Removable top-end panels help get new cattle started fast or provide more capacity for a few extra head.



Mirafount A3330

Capacity: 50 head beef
25 head dairy

Gallons: 15

Specifications: One 8¾" opening/ 9" ball closure

Dimensions: 28"x 26"x 14"



Mirafount A3465

Capacity: 100 head beef
40 head dairy

Gallons: 20

Specifications: Two 9¾" openings/ 10" ball closures

Dimensions: 36"x 24"x 18"



Mirafount A3370-S

Capacity: 250 head beef
120 head dairy
200 cow/calf units

Gallons: 100

Specifications: Six 9½" openings/ 10¾" ball closures

Dimensions: 57½"x 45½"x 20"

- Features removable end panels to help get new cattle started fast or to provide more capacity for a few extra head. Two valves are provided for fast recovery.



Lil' Fount Dog Waterer A1000

- 5 gallon capacity.
- Insulated with urethane foam.
- Sealed reservoir keeps water free of bugs, algae and dirt.
- Add ice cubes in the summer for cool, fresh water.
- Optional 250 watt heater.



E-Founts are the most economical electric heat waterers available today. All E-Founts are equipped with a 50-watt heat element and thermostat. E-Founts only require 4 kilowatts of electricity during a week of -25° temperatures. **All waterers come with a 5-year warranty.**



E-Fount A3330-E

Capacity: 50 head beef
25 head dairy
Gallons: 15
Specifications: One 8¾" opening/
9" ball closure
Dimensions: 28"x 26"x 14"

Heater Kits Are Available For All Models On This Page And Must Be Ordered Separately.



E-Fount A3465-E

Capacity: 100 head beef
40 head dairy
Gallons: 20
Specifications: Two 9¾" openings/
10" ball closures
Dimensions: 36"x 24"x 18"



E-Fount A3390-E

Capacity: 150 head beef
60 head dairy
Gallons: 44
Specifications: Two 10" openings/
10¾" ball closures
Dimensions: 43"x 29"x 20"



BIGspring features one-piece polyethylene construction for beef and dairy cattle. Tough "rockite" material for high-impact resistance to stand up to livestock abuse. Resists corrosion, no chipping or cracking with a 5-year warranty.

BIGspring A6000

Capacity: 250 head beef
100 head dairy
Gallons: 60
Drinking Height: 24"
Dimensions: 90"x 33"



Lil Spring A3200

Capacity: 150 head beef
50 head dairy
Gallons: 25
Dimensions: 48"x 24"x 29"
Drinking Height: 24"
Valve: Miraco automatic plastic
Heat: Optional 110-volt, 250-watt submersible heater.

- Large access panel for easy access to valve area with spring load clips.
- 3" offset drain.
- Access panels at both ends.
- Installs easily on most existing concrete pads.
- Constant flow available.
- Stainless-steel anchor bolts included.



Lil Spring A3100

Capacity: 100 head beef
50 head dairy
Gallons: 8
Dimensions: 36"x 22"x 27"
Drinking Height: 22"
Valve: Miraco automatic plastic
Heat: Optional 110-volt, 250-watt submersible heater.

- 3" front drain outlet for outside use.
- Bottom drain for inside use—2" threaded fitting underneath for PVC plumbing.
- Stainless-steel anchor bolts included.

Watering Systems

Lil Spring A3500

Capacity: 225 head beef
110 head dairy

Gallons: 40
Dimensions: 42"x 42"x 26"
Drinking Height: 26"

Valve: Miraco automatic plastic
Heat: Optional 110-volt, 500-watt submersible heater.

- 168" of drinking space.
- Quick release valve access cover.
- Diagonal valve compartment lets more cattle drink.
- 24" hook-up hose with shut off valve.
- 2 bottom drains.
- Stainless-steel anchor bolts included.



Lil Spring A3000

Capacity: 50 head beef
35 horses
50 head sheep

Gallons: 5
Dimensions: 24"x 22"x 21"
Drinking Height: 16"

Valve: Miraco automatic plastic
Heat: Optional 110-volt, 250-watt submersible heater.

- 3" front drain outlet for outside use.
- Bottom drain for inside use—2" threaded fitting underneath for PVC plumbing.
- Stainless-steel anchor bolts included.

Water Tank Valves with Float

- Stock-proof.
- Works at any angle.
- Easy to install and set up.



AQ100B
3/4" Brass Valve with Float



AQ400P
3/4" Poly Valve with Float
AQ500P
1" Poly Valve with Float

Heater Kits
Are Available
For All Models
On This Page
And Must Be
Ordered Separately.



New Color Options

- Gray
- Blue
- Hunter Green
- Black
- Tan



EquiFont Corner Mount A1100

Dimensions: 16"x 16"x 14"



EquiFont Wall Mount A1200

Dimensions: 16"x 16"x 14"

- Smooth rounded edges for safety.
- Durable 100% polyethylene construction; urethane foam insulation.
- Easy valve access; one-screw, quick water level adjustment.
- Four-bolt installation.
- Plumb from above or below.
- Ample drinking space; plentiful water supply with minimal waste.
- Large easy drain; no disassembly required.
- Attractive design; five color options.



Lil Spring A2900

Gallons: 6
Dimensions: 30½"x 16½"x 19"
Drinking Height: 19"

Valve: Miraco automatic plastic
Heat: Optional 110-volt, 250-watt submersible heater.
Install: 200 psi hose with shut-off valve included.



EquiFont A834-5 Insulated Extension Tube

- Cold barns are not a problem for EquiFont waterers. This insulated extension tube allows water line to enter from below without freezing.
- Rubber plug can be removed for access to water shut-off valve.

Gallagher Territory Managers



Gallagher offers the most complete customer service in the industry. Our employees are focused on helping you find the best solution for all your animal management and control needs. Contact a Gallagher Territory Manager for more information on:

- Educational seminars, clinics, and hands-on field activities.
- On-site consultation for fence design and set-up.
- Well-trained, well-stocked dealer network.
- Technical support, trouble-shooting, and an 800 number.



Find your Gallagher Territory Manager or your local dealer at www.gallagher.co



1-800-531-5908
www.gallagher.co

Gallagher is your resource for:

- Electric Fencing
- Animal Weighing and Data Collection
- EID Solutions
- Miraco Watering Systems